

## XL HYDRAULIC FOLDING GOOSENECK



XL 110 Hydraulic Folding Gooseneck

### YOUR SOLUTIONS-BASED HAULING PARTNER



XL 100 HFG

#### REVOLUTIONARY DESIGN

The XL Hydraulic Folding Gooseneck handles your heaviest hauling challenges. The **low incline ramp** makes it easy and safe to load and transport pavers, scrapers and other heavy equipment. The **neck adjusts to uneven terrain** without the use of blocks so you can load and unload almost anywhere.



XL 100 FG: Pipeline Special

#### XL HFG: PIPELINE SPECIAL

The XL HFG: Pipeline Special is engineered to handle demanding off road applications. It features a **heavy-duty cross members, heavy-duty outriggers and top flange reinforcement.**



XL 80 HFG: Railroad Special

#### XL HFG: RAILROAD SPECIAL

The XL HFG: Railroad Special offers users a solution for hauling large, heavy equipment that requires heavy-duty ramps to load. It features a **57" gauge rail** (submerged in gooseneck and deck) and **8' pin on aluminum gooseneck ramps** with bolt on steel tips.


#### BUILT WITH YOU IN MIND

- Strong hydraulic neck
- 9' 8" gooseneck length
- 26' main deck
- Bucket well
- Low incline ramp
- 40" rear deck height
- 16" & 40" king pin settings
- 52' 3" overall length
- 106" & 82" swing clearance
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty.**
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty.**

#### FIND YOUR SPECIALIZED SOLUTION TODAY

visit [xlspecializedtrailer.com](http://xlspecializedtrailer.com)

# XL HYDRAULIC FOLDING GOOSENECK

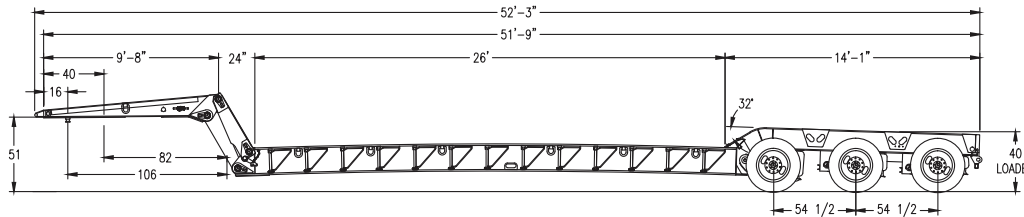

**XL 100 HFG**  
CAPACITY: 100,000 LB OVERALL  
CONCENTRATED: 100,000 LB IN 10'  
OAL: 52' 3" | OAW: 102"

## SPECS

### GOOSENECK

HYDRAULIC FOLDING  
9' 8" LONG  
16" & 40" KING PIN SETTING  
106" & 82" SWING CLEARANCE  
51" 5TH WHEEL HEIGHT  
6" TAPERED NOSE WITH LIFT EYE  
(1) D-RING PER SIDE  
1 3/4" APITONG RAISED  
7° LOAD ANGLE  
UPPER FLANGE REINFORCEMENT  
TOOL BOX BEHIND KING PIN

### SUSPENSION

25,000 LB AIR RIDE  
RAISE AND LOWER VALVE

### REAR DECK

14' 1" LONG  
40" LOADED DECK HEIGHT  
(2) FLAG HOLDERS

### HYDRAULICS

13 HP UNIT WITH CONTROL  
ON DRIVER'S SIDE

### MAIN DECK

26' LONG WITH BUCKET WELL  
26" LOADED DECK HEIGHT  
8" GROUND CLEARANCE  
1 3/4" APITONG DECKING RAISED  
CROSS MEMBERS DESIGNED FOR  
CENTER LOADING  
PERIMETER FRAME DESIGN 18" BEAMS  
HEAVY DUTY REMOVABLE SWING OUT  
REMOVABLE OUTRIGGERS  
(6) D-RINGS PER SIDE  
(2) FLAG HOLDERS AT FRONT

### AXLES

(3) 25,000 NOMINAL, 77 1/2" TRACKING  
54 1/2" AXLE SPACING  
SPRING BRAKES ON 1 AXLE  
16 1/2" X 7" BRAKES  
HUB PILOT, OUTBOARD DRUMS  
LIMIT CHAINS ON ALL AXLES

### WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS  
255 / 70R / 22.5 TIRES

### LIGHTING

D.O.T. APPROVED 12V SEALED  
GROTE HARNESS  
RUBBER MOUNTED LED LIGHTS  
(1) MID-TURN SIGNAL PER SIDE  
(2) CLEARANCE LIGHT PER SIDE  
7 POLE ELECTRICAL SOCKET  
2 TAIL LIGHT PACKAGE WITH  
ALUMINUM COVER


### NEW INDUSTRY-LEADING PAINT PROCESS

1 YEAR WARRANTY  
BLACK, IH RED, OR NEW CAT YELLOW  
AIR & ELECTRIC DONE AFTER

### AVAILABLE MODELS

XL 100 HFG  
XL 110 HFG  
XL 120 HFG  
OTHER CUSTOM CAPACITIES  
AVAILABLE

## OPTIONS



### POPULAR OPTIONS

Single drop conversion  
Oil field spec with rollers  
Winch in wheel area  
Multiple king pin settings  
13 HP self-contained or wet line  
operated power unit

Upper flange reinforcement on  
main deck  
Dual hydraulic system  
Prepped for Flip Axles,  
Boosters and Power Boosters  
Many more available