



# XL LOW-PROFILE HDG: 15" DECK HEIGHT



## FEATURES

- 13-foot gooseneck with 110 inches of swing clearance
- Gooseneck relief cut-outs allow truck fenders to clear
- 15-inch loaded deck height
- Frame reinforcement for a fourth axle
- 275 tires and recessed bolsters
- Heavy-duty 31-inch front flip ramps
- Third axle air lift



## LOWEST STANDARD DECK HEIGHT


With a loaded deck height of only fifteen inches, this flat deck lowboy can accommodate loads that may otherwise require a dropside trailer. XL's Low-Profile HDG features a capacity of 110,000 pounds in 12 feet and the ability to add a flip axle if needed, therefore handling a wide range of loads.

## MAXIMUM VERSATILITY

Enjoy XL's construction-focused and customer-friendly features. In the rear, a deep bucket well provides an area for an excavator bucket to ride safely without detaching the lower boom section. The main deck offers many tie-down points with 4 flat d-rings inside both the front toolbox and rear bucket well, 7 bent d-rings per side, 13 chain drops per side as well as swing out outriggers on 24-inch centers.

DESIGNED FOR YOU. BUILT TO LAST.

[www.xlspecializedtrailer.com](http://www.xlspecializedtrailer.com) | 877.283.4852

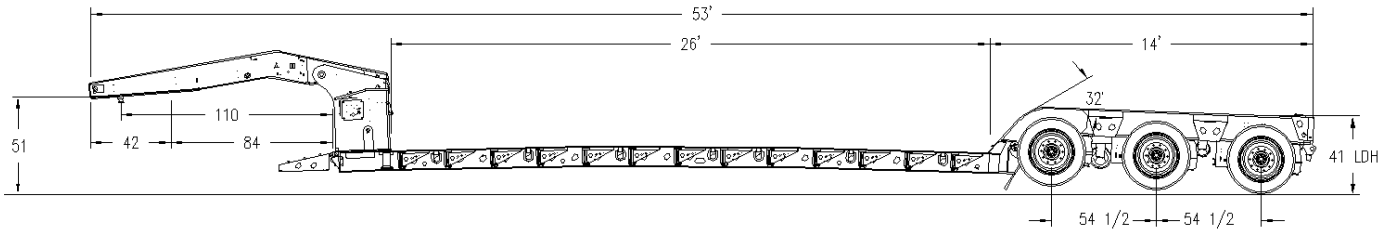

# XL 110 LOW-PROFILE HDG: 15" DECK HEIGHT SPECS

## CAPACITY

capacity: 110,000 lb overall  
concentrated: 110,000 lb in 12'

## OVERALL LENGTH & WIDTH

overall length: 53'  
overall width: 102"

## GOOSENECK

13' low-profile style neck  
with relief cut-out  
51" 5th wheel height  
5 position variable ride height  
110" & 84" swing clearance  
16" & 42" king pin setting  
hydraulics run off wet kit  
air operated lock with manual  
safety latch  
brackets for power unit  
work light

## GOOSENECK OPTIONS

toolbox in rear of neck with  
steel door  
13HP power unit, base of neck,  
steel cover, dual hydraulics  
13HP power unit, top of neck,  
dual hydraulics  
steel fenders on side of  
gooseneck  
aluminum fenders on side of  
gooseneck  
registration holder

## MAIN DECK

26' long  
T-1 flange, 80K web  
(4) 10 1/2" fabricated i-beams  
15" loaded deck height  
4 1/2" ground clearance  
6" & 4" stubbed jr. i-beams on  
alternating 12" centers  
31" front flip ramps  
7 bent d-rings per side  
1 3/8" Apatong decking - raised,  
open center  
toolbox in front of deck  
4 flat d-rings in toolbox  
13 chain drops per side  
swing out outriggers on 24" centers  
heavy-duty front flatback outriggers

2 flag holders  
bucket well at rear, plate on bottom  
4 flat d-rings in bucket well  
front ramp upper flange reinforcement

## MAIN DECK OPTIONS

upper flange reinforcement  
center deck covered  
2 additional pair of clearance lights  
Oak outrigger planks, 2" x 10"

## REAR BRIDGE

rear transition with 32° slope  
41" loaded deck height  
37" bolster height  
open wheels - bolster style  
open boom trough  
2 flat d-rings on main beams at rear  
2 chain drops on each bolster  
2 flag holders  
2 stake pockets in tail channel  
for wide load sign  
frame reinforcement for flip axle

## REAR BRIDGE OPTIONS

removable wheel covers heavy-duty,  
load bearing  
covered boom trough,  
bolt-on bottom plate  
4" amber strobe tail light  
battery back-up with 4-way plug for FA  
wide load sign  
(1) 4-way plug at rear

## SUSPENSION

25,000 lb air ride  
raise and lower valve  
manual ride height control  
liquid filled air gauge

## SUSPENSION OPTIONS

Air-weigh digital scale

## AXLES

(3) 25,000 lb nominal  
air lift on 3rd axle  
hub pilot, outboard drums  
16 1/2" X 7" brakes  
auto slack adjusters  
54 1/2" axle spacing  
limit chains on all axles

spring brakes on 1 axle  
ABS not required

## AXLE OPTIONS

hubometer  
dust shields  
cat eye systems

## WHEELS & TIRES

8.25 x 22.5 steel rims  
275 / 70R / 22.5 tires

## WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)  
aluminum mill wheels (outside)  
aluminum polished wheels (outside)  
aluminum Durabright wheels  
(outside)

## LIGHTING

12V sealed Grote harness  
rubber mounted LED lights  
2 tail light package with  
aluminum cover  
2 clearance lights per side  
1 mid-turn light per side  
7 pole electric socket

## PAINT

black, IH red, CAT yellow  
air & electric done after paint

## PAINT OPTIONS

non-standard paint colors  
non-standard metallic paint

## WARRANTY

5 year structural  
1 year paint

## AVAILABLE MODELS

XL 110 Low-Profile HDG  
XL 110 Low-Profile HDG: 15" deck height  
XL 110 Low-Profile HDG: 18" deck height  
XL 120 Low-Profile HDG  
other custom capacities also available,  
ask your sales representative for details  
standard features vary with custom units

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852