



FEATURES

- 5 position ratchet-style ride height control
- 32° slope for vehicles onto the rear deck
- Optional bolt on wheel covers can be removed for weight reduction
- Frame reinforcement for flip axle
- 2 chain slots on each bolster
- Deep bucket and open boom trough



VERSATILE DECK FEATURES


The XL 80 Low-Profile HDG deck is fully equipped for versatile hauling, with chain drops, bent D-rings, and swing out outriggers. Choose the main deck length right for your needs; 24' in the well (44' 6" OAL), 26' in the well (46' 6" OAL) or 27' 6" in the well (48' OAL).

LIGHTWEIGHT DESIGN

This two axle construction style lowboy offers a lightweight design, making an effective set-up with your 3 axle truck. The low-profile gooseneck neck and 31-i front flip ramps enable loading on the front, while the low bucket well and boom trough in the rear provide a safe place for an excavator bucket to ride.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

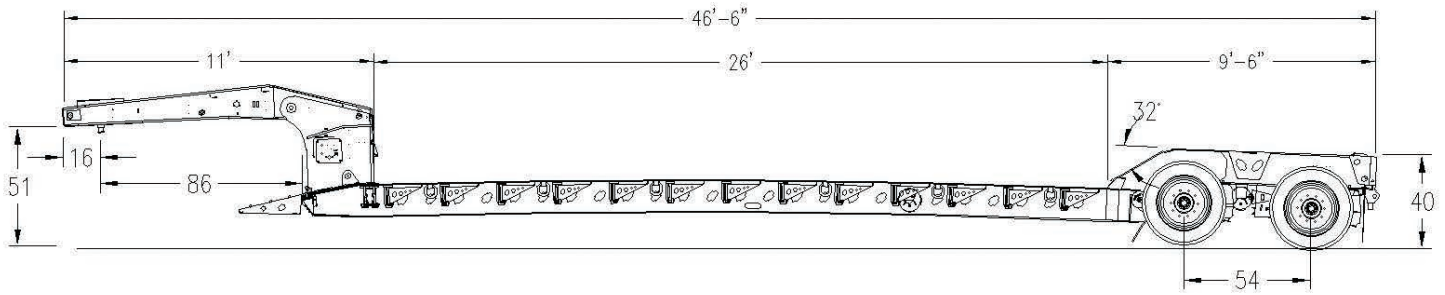

XL 80 LOW-PROFILE HDG SPECS

CAPACITY

capacity: 80,000 lb overall
concentrated: 80,000 lb in 10'

OVERALL LENGTH & WIDTH

overall length: 44' 6", 46' 6" or 48'
overall width: 102"

GOOSENECK

11' low-profile style neck
51" 5th wheel height
5 position variable ride height
86" swing clearance
16" king pin setting
hydraulics run off wet kit
air operated lock with manual safety latch
brackets for power unit

GOOSENECK OPTIONS

toolbox in rear of neck with steel door
13HP power unit, base of neck, steel cover, dual hydraulics
13HP power unit, top of neck, dual hydraulics
steel fenders on side of gooseneck
aluminum fenders on side of gooseneck
registration holder

MAIN DECK

T-1 flange, 80K web
(4) 14" fully fabricated i-beams
22" loaded deck height
8" ground clearance
8" & 4" stubbed jr. i-beams on alternating 12" centers
31" front flip ramps
6 bent d-rings per side
1 3/8" Apitong decking - raised, open center
chain drops on 24" centers
12" swing out outriggers on 24" centers
heavy-duty flatback outriggers, front
(2) flag holders
bucket well at rear, plate on bottom
front ramp upper flange reinforcement

MAIN DECK OPTIONS

24' long main deck (44' 6" OAL)
26' long main deck (46' 6" OAL)
27' 6" main deck (48' OAL)
center deck covered
storage compartments in front of main deck
Oak outrigger planks, 2" x 10"

REAR BRIDGE

9' 6" long
rear transition with 32° slope
40" loaded deck height
open wheels - bolster style
open boom trough
2 flat d-rings on main beams at rear
2 chain drops on each bolster
2 flag holders
2 stake pockets in tail channel for wide load sign
frame reinforcement for flip axle

REAR BRIDGE OPTIONS

removable wheel covers heavy-duty, load-bearing
removable wheel covers medium-duty, non load-bearing
covered boom trough, bolt-on bottom plate
4" amber strobe tail light
battery back-up w. 4-way plug for FA
wide load sign
(1) 4-way plug at rear

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

SUSPENSION OPTIONS

Air-weigh digital scale
liquid filled air gauge

AXLES

(2) 25,000 lb nominal hub pilot, outboard drums
16 1/2" X 7" brakes
auto slack adjusters
limit chains on all axles
spring brakes on 1 axle
2S1M

AXLE OPTIONS

hubometer
dust shields
cat eye systems

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels (outside)

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 80 Low-Profile HDG
other custom capacities also available,
ask your sales representative for details
standard features vary with custom units

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852