


XL HYDRAULIC DETACHABLE EXTENDABLE



XL 110 Hydraulic Detachable Extendable

YOUR SOLUTIONS-BASED HAULING PARTNER



XL Extend-A-Trac

PATENTED XL EXTEND-A-TRAC

The XL Extend-A-Trac allows for extending and retracting the trailer without hooking and unhooking air and electrical lines. **6" greaseable rollers** incorporate oil impregnated bronze bushings to make extending easy.



XL 120 HDE

SUPERIOR VERSATILITY

7 position variable ride height makes hooking up to the truck easy. The XL Extend-A-Trac has optional **extension locks as small as 1'** or other specific open well lengths, offering an excellent hydraulic solution for hauling extra long materials.



XL 90 HDE

BUILT TO LAST

XL HDEs feature double box beam construction, which increase stability and durability. XL's **one-piece construction process** results in stronger products. I-beams are made from one piece web and flange and then welded on all sides.


BUILT WITH YOU IN MIND

- 48' overall length
- 24' 1" deck extends to 40' 5" to handle extra long loads
- 7 position variable ride height for hooking up at various heights
- Haul with even more versatility, with the popular 2' option which allows you to extend in 2' increments.
- 40" rear deck height
- 16" king pin setting
- 84" swing clearance
- 10' 5" gooseneck length
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY


visit xlspecializedtrailer.com

XL HYDRAULIC DETACHABLE EXTENDABLE

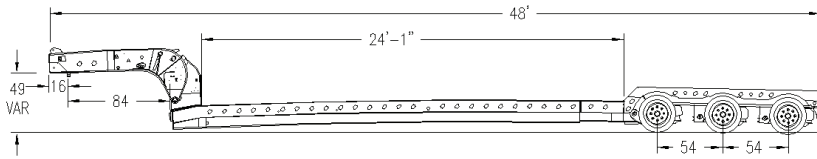

XL110 HDE

CAPACITY: 110,000 LB OVERALL CLOSED
CONCENTRATED: 90,000 LB IN 10' CLOSED
OAL: 48' | OAW: 102"

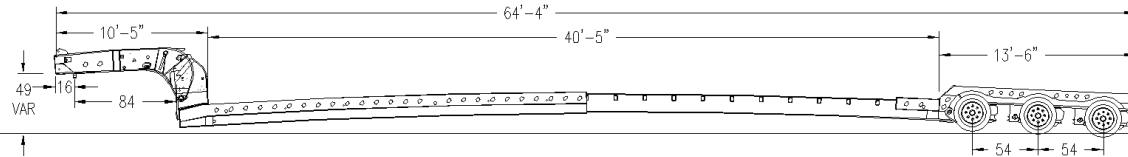

SPECS

GOOSENECK

HYDRAULIC DETACHABLE NARROW NECK
APPROXIMATELY 35" TRAVEL UP/DOWN
10' 5" NON-GROUND BEARING
7 POSITION VARIABLE RIDE HEIGHT
84" SWING CLEARANCE
16" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT
AIR OPERATED LOCK W/ MANUAL
SAFETY LATCH

SUSPENSION

25,000 LB AIR RIDE

AXLES

(3) 25,000 LB NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
16½ X 7" BRAKES

WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5 TIRES

MAIN DECK

24' 1" - 40' 5" LONG
T-1 FLANGE, 80K WEB
24" LOADED DECK HEIGHT
6" GROUND CLEARANCE
DOUBLE BOX BEAM CONSTRUCTION
(5) BENT D-RINGS PER SIDE
6" JR. I-BEAM CROSS MEMBERS ON 12"
ALT. CENTERS
FAB I-BEAM OUTSIDE RAILS
XL PATENTED EXTEND-A-TRAC
1½" APITONG DECKING FLUSH
AIR OPERATED LOCK PIN W/ 5 STOPS
2'-3'-5'-5'-5'
(8) 6" GREASEABLE ROLLERS

REAR BRIDGE

13' 6" LONG
COVERED WHEELS
40" DECK HEIGHT
1½" APITONG DECKING FLUSH
(2) FLAG HOLDERS
(2) BENT D-RINGS IN TAIL CHANNEL

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER

NEW INDUSTRY-LEADING PAINT PROCESS

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

XL 70 HDE
XL 80 HDE
XL 90 HDE
XL 100 HDE
XL 110 HDE
XL 120 HDE
XL 130 HDE

OPTIONS



POPULAR OPTIONS

Aluminum fenders
Patented XL Cheater Neck
Dual hydraulic system
Detachable wheel area
Axles through the web for a
28" loaded deck height

31" front loading ramps
Jeeps, Flip Axles, Boosters
Outriggers
30,000 lb suspension
Fab I-beam outside rails
Many more available