



FEATURES

- Save time with the quick moving sliding axle assembly
- 6 1/2 degree load angle for loading pavers & rollers
- Versions available with lengths of 48', 51' and 53'
- California legal and R-tac legal specs available
- Chain drops down the outer and inner beams
- 20,000 lb winch with 100' of 9/16" cable
- Front winch pulls inoperable equipment



SLIDING AXLE ASSEMBLY


The XL Slider features an extended dump angle of 17 degrees and improved hydraulics to keep your equipment from unnecessary wear. Hydraulic sliding axle assembly with traveling bumper provides under ride protection.

USER-FRIENDLY FEATURES

Haul forklifts with the durable 4-inch and 3-inch jr. i-beam crossmembers on 8-inch centers. Enjoy new standard features: chain slots down the outer and center beams, a 2-function wireless remote, and composite rollers that do not need to be greased.

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852

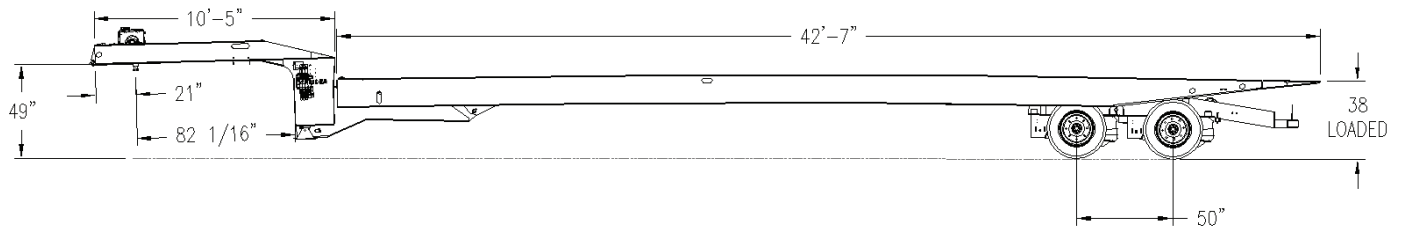

XL SLIDE AXLE SPECS

CAPACITY

capacity: 80,000 lb overall
concentrated: 50,000 lb in 10'

OVERALL LENGTH & WIDTH

overall length: 48', 51' or 53'
overall width: 102"

UPPER DECK

10' 5" full-width goosneck
49" 5th wheel height
82" swing clearance
21" king pin setting
1 3/8" Apatong decking - raised
2 toolboxes in upper deck with steel doors
1 recessed cable roller, back of neck
chain drops on 48" centers, both sides
hydraulics run off of wet kit
hydraulic control levers
2 speed landing gear
20,000 lb hydraulic winch with manual
kickout, & 100' of 9/16" cable with loop,
planetary drive
2 function wireless remote

UPPER DECK OPTIONS

5th wheel height other than 49"
28HP power unit with dual
hydraulics
Mark V 2 speed landing gear
hydraulic park stands
15,000 lb hydraulic planetary drive
winch with 1/2" cable & loop
30,000 lb hydraulic planetary drive
winch with 9/16" cable & loop
air kickout for winch
6 function wireless winch remote control
7 function wireless remote, for use with
air kickout option
10 function wireless remote, for use with
air kickout & dock levelers
registration holder

MAIN DECK

T-1 flange, 80K web
(4) fabricated i-beams
38" loaded deck height
1 recessed cable roller in front
1 3/8" Apatong decking - raised

4" jr i-beam & 3" jr i-beam cross members
on 8" centers
chain drops on 24" centers, each side
double chain drops down the center
energy chain to protect air, electric,
and hydraulic lines
6 1/2° load angle
48' OAL: 17° dump angle
51' OAL: 16° dump angle
53' OAL: 15° dump angle

MAIN DECK OPTIONS

9' wide
10' wide
dock levelers
stake pockets alternating with chain slots
on 12" centers, outer beams
additional bent d-rings
pan-style d-rings
drop down d-rings
amber strobe as third taillight

SUSPENSION

25,000 lb air ride
manual dump valve

SUSPENSION OPTIONS

liquid filled air gauge
Air-weigh digital scale

AXLES

(2) 25,000 lb nominal
50" axle spacing
hub pilot, outboard drums
12 1/4" x 7 1/2" brakes
auto slack adjusters
limit chains on all axles
2S1M spring brakes on 1 axle
greaseless rollers on sliding axle assembly

AXLE OPTIONS

60" axle spacing
chassis uni lube system
cam covers
hubometer
dust shields
spring brakes on 2nd axle

WHEELS & TIRES

6.75 x 17.5 steel rims
245 / 70R / 17.5 tires

WHEEL & TIRE OPTIONS

235/75R/17.5 tires
245/70R/17.5 michelin tires
255/70R/22.5 16pr radial
(deck height + 4.5")
PSI tire inflation system
aluminum polished wheels
aluminum Durabright wheels

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 80 SA
XL 80 SA: California legal
XL 80 SA: R-tac legal
XL 110 SA

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852