


XL LOW-PROFILE (SCRAPER) GOOSENECK



XL 55 Ton HDG Low-Profile (Scraper) Gooseneck

YOUR SOLUTIONS-BASED HAULING PARTNER



32° slope of rear transition

LOW-PROFILE ADVANTAGE

The low-profile neck, with a 26' well and a 32° slope of rear transition area makes loading vehicles onto the rear deck extremely efficient for hauling Scrapers and trucks of all sizes.



heavy-duty outriggers
upper flange reinforcement

BUILT TO LAST

Heavy-duty (full-depth) swing out outriggers distribute weight along the entire beam, not just the web. 12" cross member spacing in the outer bays prevent wood deterioration under concentrated loads.



SCRAPER DELUXE OPTION

The Scraper Deluxe package offers the air lift on the 3rd axle, 31" front flip ramps, 4" amber strobe light with battery backup box, 4 way plug at rear for strobe on FA to run off of battery backup, bolt on flush covered wheels - bolster style, and a 13 HP unit with dual hydraulics.


BUILT WITH YOU IN MIND

- Lock pin automatically engages at every transport position for safe travel.
- 4 position ratchet-style ride height control adjusts height simply by moving a lever.
- Overall capacity of 110,000 lb
- Concentrated load rating of 100,000 lb in 10'
- 3rd axle lift can raise axle for return trip, reducing tire wear.
- Bolt on wheel covers can be removed for weight reduction.
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a full 1 year warranty.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a 5 year structural warranty.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL LOW PROFILE (SCRAPER) GOOSENECK

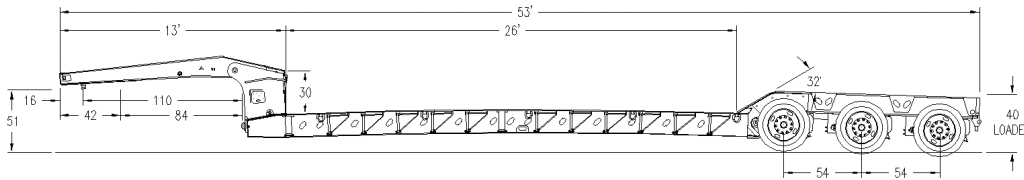

XL 110 HDG - LOW-PROFILE
CAPACITY: 110,000 LB OVERALL
CONCENTRATED: 100,000 LB
IN 10' CLOSED
OAL: 53' | OAW: 102"

SPECS

GOOSENECK

13' LOW-PROFILE SCRAPER STYLE NECK
51" 5TH WHEEL HEIGHT
4 VARIABLE RIDE HEIGHT POSITIONS
110" & 84" SWING CLEARANCE
16" & 42" KING PIN SETTING
HYDRAULICS RUN OFF OF WET KIT

MAIN DECK

26' LONG
T-I FLANGE, 80K WEB
(4) 16" FULLY CAMBERED I-BEAMS
24" LOADED DECK HEIGHT
8" GROUND CLEARANCE
10" & 4" STUBBED JR. I-BEAMS ON
12" ALTERNATING CENTERS
(5) BENT D-RINGS PER SIDE
1 3/8" APITONG DECKING RAISED -
OPEN CENTER
REMOVABLE HEAVY-DUTY SWING
OUT OUTRIGGERS
HEAVY-DUTY FLAT BACK OUTRIGGERS
ON 24" CENTERS, FRONT AND CENTER
BUCKET WELL AT REAR WITH PLATE
ON BOTTOM
(2) FLAG HOLDERS

REAR BRIDGE

14' LONG WITH 32° REAR TRANSITION
40" LOADED DECK HEIGHT
OPEN WHEELS-BOLSTER STYLE
OPEN BOOM TROUGH
(2) BENT D-RINGS IN TAIL CHANNEL
FRAME REINFORCEMENT
(4) FLAG HOLDERS

SUSPENSION

25,000 LB AIR RIDE
RAISE AND LOWER VALVE

AXLES

(3) 25,000 LB NOMINAL
54" SPACING
HUB PILOT, OUTBOARD DRUMS
1 1/2" X 7" BRAKES
LIMIT CHAINS ON ALL AXLES
SPRING BRAKES ON 1 AXLE
ABS NOT REQUIRED

WHEELS AND TIRES

8.25 X 22.5 STEEL RIMS
255 / 70R / 22.5 TIRES

LIGHTING

D.O.T. APPROVED 12V SEALED
GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH
ALUMINUM COVER


NEW INDUSTRY-LEADING PAINT PROCESS

FULL 1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER PAINT

AVAILABLE MODELS

XL 110 HDG - LOW-PROFILE
XL 110 HDG - LOW-PROFILE SCRAPER
DELUXE PACKAGE

OPTIONS



POPULAR OPTIONS

Covered deck
Tool box in main deck
4" amber strobe light
Air weigh digital scale
Additional D-rings

Open boom trough
Aluminum mill/polished wheels
13 HP self-contained power unit
7 position manual ride height
Many more available