



## FEATURES

- Lockable toolbox features chain rack and light
- Ideal design for hauling wide wheeled equipment
- Pullout front ramp, steel and aluminum
- Traction aids on the rear bridge transition
- Angled control panel for easy access
- Front ramp tapers to 4 inches
- Rear is reinforced for flip axle



## FULLY EQUIPPED MAIN DECK

The XL 80 MFG deck is fully equipped for versatile hauling with fourteen half-inch chain drops per side, six bent d-rings per side, and aluminum pullout outriggers. The rugged Apitong decking stands up to years of wear and tear.




## ALUMINUM OUTRIGGERS

XL's pullout outriggers boast helpful features; 45 degree angled corners prevent tire damage while cleanout holes allow dirt and debris to escape, preventing rust. They extend 27", taking the deck from 8.5 feet wide to 13 feet wide. Each extrusion, set on 18 inch centers, has a capacity of 4,400 pound.

DESIGNED FOR YOU. BUILT TO LAST.

[www.xlspecializedtrailer.com](http://www.xlspecializedtrailer.com) | 877.283.4852

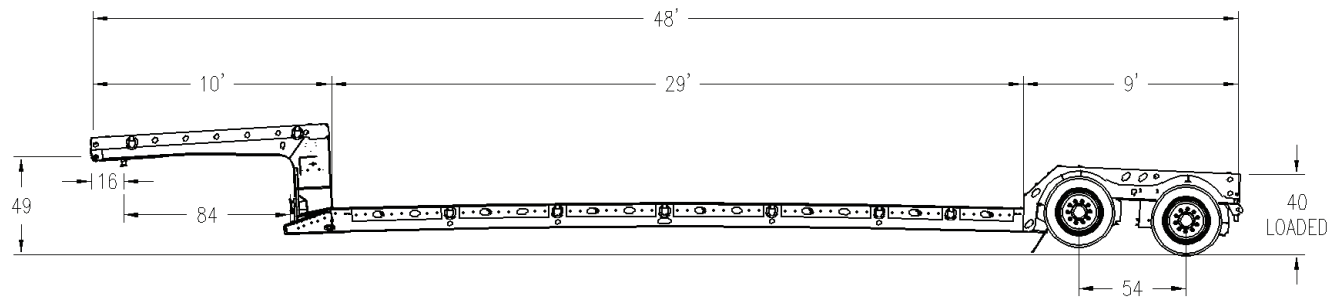

# XL 80 MFG: PULLOUTS SPECS

## CAPACITY

capacity: 80,000 lb overall  
concentrated: 70,000 lb in 16'

## OVERALL LENGTH & WIDTH

overall length: 48'  
overall width: 102"

## GOOSENECK

mechanical detachable full-width  
10' long  
49" 5th wheel height  
84" swing clearance  
16" king pin setting with 3/8" plate  
2 bent d-rings per side  
2 pan style d-rings per side,  
on corners  
1 1/8" Apitong decking - flush  
aluminum mudflaps  
double donut front connector plate  
toolbox in base w/ lockable  
aluminum lid, chain rack, light

## GOOSENECK OPTIONS

pull out lights  
1 pair clearance lights  
1 3/8" Apitong decking - raised  
registration holder

## MAIN DECK

29' long  
T-1, 80k web  
(4) 12" fab i-beams  
18" loaded deck height  
6" ground clearance  
6" jr. i-beam cross members  
on 18" centers  
6 bent d-rings per side  
4 pan style d-rings per side  
1 1/8" apitong decking flush,  
center covered  
ramp tapers to 4"  
(18) 1/2" chain drops per side  
aluminum pullout outriggers  
on 18" centers  
aluminum pullout front ramps

## MAIN DECK OPTIONS

center deck open  
storage compartments in front  
of main deck  
1 3/8" Apitong decking - raised  
clearance lights  
4-way plug(s)

## REAR BRIDGE

9' long  
40" deck height  
1 1/8" Apitong decking flush  
2 flag holders  
2 stake pockets in tail channel  
2 pan style d-rings per side,  
on corners  
frame reinforcement for flip axle  
66" wide bumper at rear

## REAR BRIDGE OPTIONS

1 pair clearance lights  
pull out lights  
4" amber strobe tail light  
additional tail light  
battery back up  
(1) 4-way plug  
1 3/8" Apitong decking - raised  
dock bumpers

## SUSPENSION

25,000 lb air ride  
raise and lower valve  
manual ride height control

## SUSPENSION OPTIONS

liquid filled air gauge  
air weigh digital scale  
control in aluminum box - ball valves  
electric dump valve with 4-way plug  
and wire

## AXLES

(2) 25,000 lb nominal  
54" spacing  
hub pilot, outboard drums  
4S2M ABS

16 1/2" x 7" brakes  
(2) pair spring brakes

## AXLE OPTIONS

hubometer  
TP axles (same inner & outer bearings)

## WHEELS & TIRES

8.25 x 22.5 steel rims  
255 / 70R / 22.5 tires

## WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)  
aluminum mill wheels (outside)  
aluminum polished wheels (outside)  
aluminum Durabright wheels (outside)  
Michelin 255/70R/22.5 tires  
Goodyear 275/70R/22.5 tire  
(41" rear bridge)

## LIGHTING

12V sealed Grote harness  
rubber mounted LED lights  
2 tail light package with  
aluminum cover  
2 clearance lights per side  
1 mid-turn light per side  
7 pole electric socket

## PAINT

black, IH red, CAT yellow  
air & electric done after paint

## PAINT OPTIONS

non-standard paint colors  
non-standard metallic paint

## WARRANTY

5 year structural  
1 year paint

## AVAILABLE MODELS

XL 80 MFG  
other custom capacities also available,  
ask your sales rep for details  
standard features vary with custom MFGs

DESIGNED FOR YOU. BUILT TO LAST.

www.xlspecializedtrailer.com | 877.283.4852